




1. Apply glue to the holes

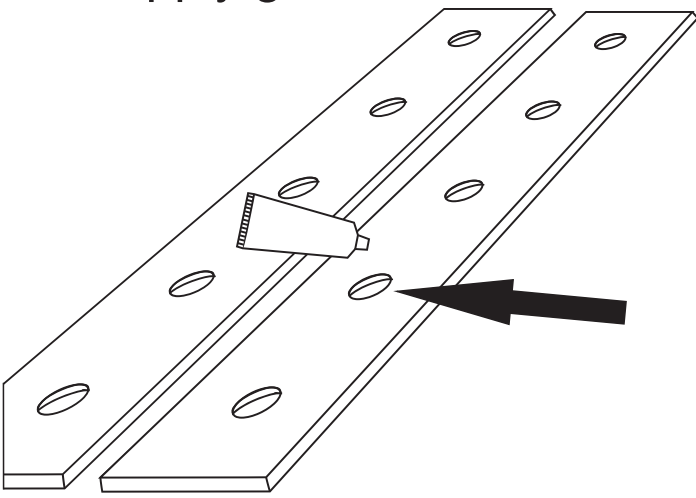


2. Using a hammer, drive the rods into one of two boards

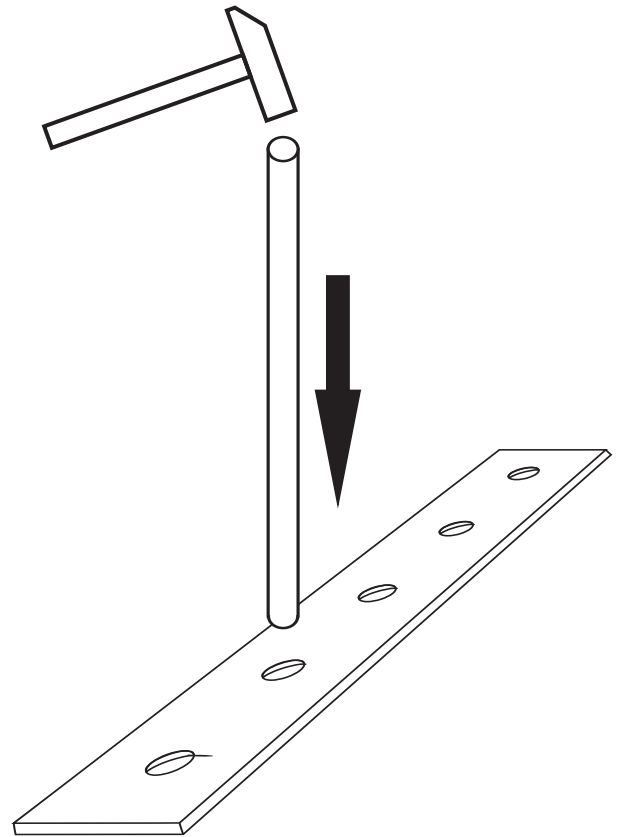

3. We break the ladder together.
we recommend using a spacer
to avoid damaging the ladder

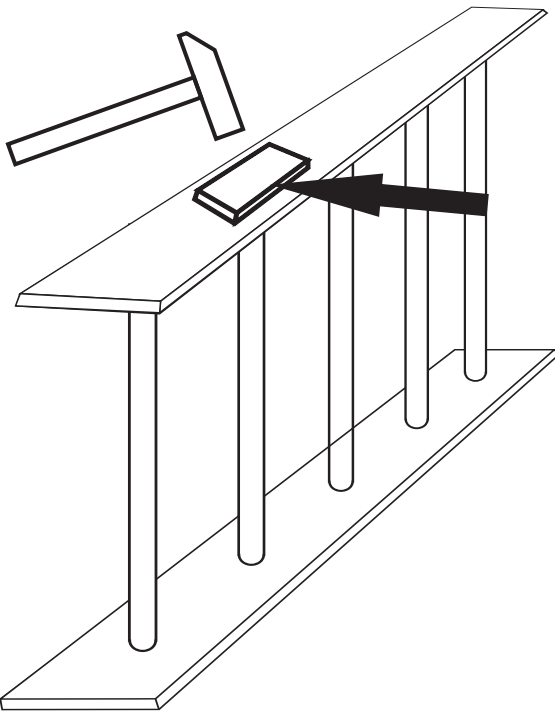

4. We twist the ladder at the points
marked on the boards,
using torx screws.

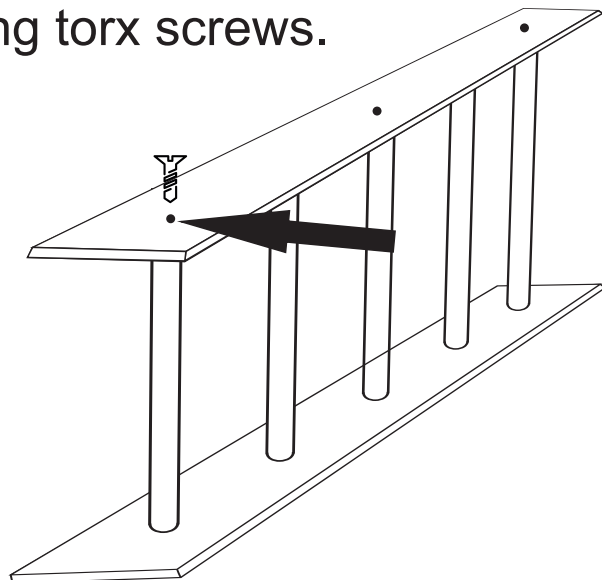

The remaining 4 dowels and screws
are used to mount the ladder to the wall.

**Any steps of this manual where hammer is required,
we highly recommended to use spacer (wood, plastic, hard rubber etc.)
to balance the force and prevent destroying a gantla materials.**